


## Technical Data

	KSF E 89x1000-E60	KSF E 89x800-E60	KSF E 89x550-E60
<b>a</b> Length (mm) ( $\pm 25$ mm)	1000	800	550
<b>b</b> Outer diameter (mm)	88.90	88.90	88.90
<b>c</b> Inner diameter (mm)	81.70	81.70	81.70
<b>d</b> Diameter setting* (mm)	60	60	60
<b>e</b> Depth setting (mm) ( $\pm 25$ mm)	270	270	270
<b>f</b> Alignment range	3° (incl. Excenter)	3° (incl. Excenter)	3° (incl. Excenter)
<b>g</b> Thread	3 x M8	3 x M8	3 x M8
<b>h</b> Pitch circle diameter (mm)	118	118	118
<b>i</b> Flange outer diameter (mm)	136	136	136
<b>j</b> Flange thickness (mm)	3	3	3

\*Diameter setting (a) result in depth setting (e) and alignment range (f)

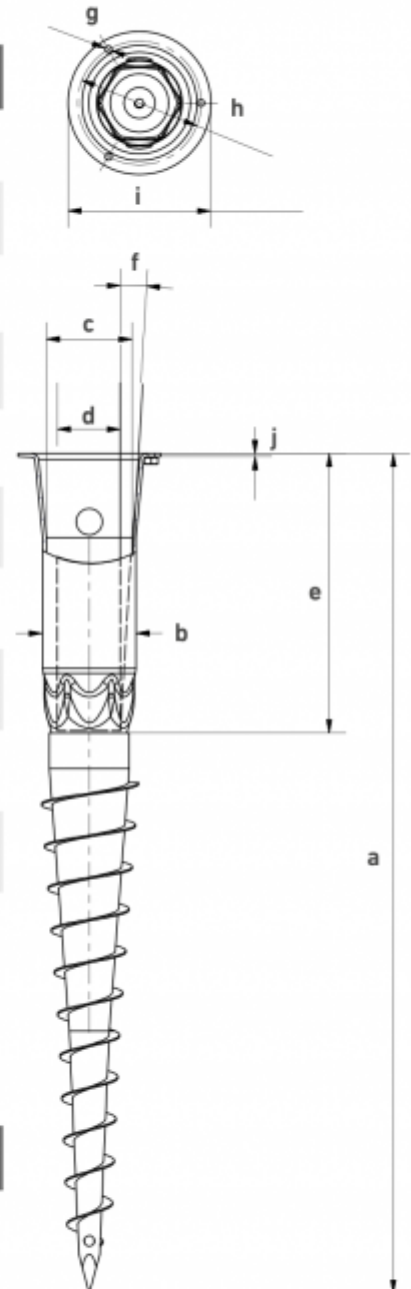

## Online Service

KSF E 89x1000-E60	KSF E 89x800-E60	KSF E 89x550-E60
Webkey E2410011D	E2408011D	E2405511D

